

PARCS DOCKLANDS

The Dock-In Bays are screened bays for noisy offices and are the central element of DOCKLANDS range. An anchor point in a mobile working environment or private area dedicated to focused work in open space. Within a shared office environment the Dock-In Bay is a temporary, alternative workplace for individual focused work. Its inviting design and acoustic and visual screening provide a high level of comfort

at work. Dock-In Bays offer a wide range of uses for space planning and shaping without affecting a building's structure. Dock-In Bays are available in single or two-person work place units and allow for a variety of configurations: face to face, side by side, back to back, or in an unlimited row configuration, one after another.

Design: PearsonLloyd




PRODUCT DESCRIPTION

DOCK-IN BAYS


- 1 **Soft Wall:** comprising of several Soft Wall panels. A Wooden substructure upholstered with 5mm polyurethane foam padding on the inside and out. A fire resistant version (CMHR) is optionally available. Interior and exterior coverings can be selected from a wide range of fabric groups. Covers always come with double stitching on all stitched edges.

Assembly of the Soft Wall panels is achieved by threading them together with 20mm thick rods, attached to a floor rail (SZ Black). Adjustable feet can be used to level the bays (± 5 mm).

Sound absorption according to ISO 11654
 Rated sound absorption level α_w 0.65 (in acoustically activated areas)
 Absorption class = C



- 2 **Straight wall element:** comprising of a wooden (chipboard) frame with a melamine or veneer covered lower panel and a fabric upper panel. The lower panel can be optionally equipped with a flush-integrated connection plug board. Top and side cover plates, in Vanished MDF, conceal the inner frame. A peripheral black plastic base features adjustable feet to level the bays (± 5 mm).
- 3 **Table top:** 19mm chipboard or 13mm compact top in melamine or veneer. Table top connection using angle brackets can be levelled using slotted holes. Steel frame construction beneath the table top.

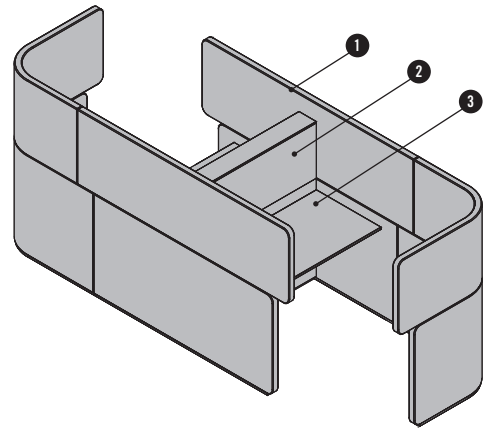


SERVICE DOCK

- 1 **Soft Wall:** consisting of several panels. Wooden substructure, upholstered with 5mm polyurethane foam padding on the inside and outside. Optionally as a fire resistant version (CMHR).

Interior and exterior covers can be selected from different fabric groups. Covers always come with double stitching on all stitched edges.

Assembly of the Soft Wall panels is achieved by threading them together with 20mm thick rods, attached to a floor rail (SZ Black). Adjustable feet can be used to level the bays (± 5 mm).

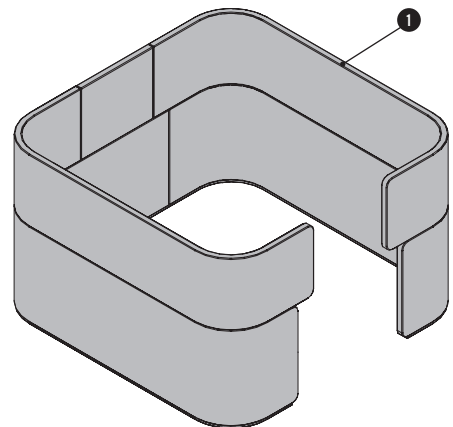

PRODUCT DESCRIPTION


COAT RACK

1 Soft Wall: consisting of several panels. Wooden substructure, upholstered with 5 mm polyurethane foam padding on the inside and outside. Optionally as a fire resistant version (CMHR).

Interior and exterior surfaces can be selected from different fabric groups. Covers always come with double stitching on all stitched edges.

Connection of Soft Wall panels over 20mm threaded rods in the floor rail, in SZ black, levelling with the help of adjustment feet ± 5 mm.

2 Coat rod: in chrome, diameter 28 mm

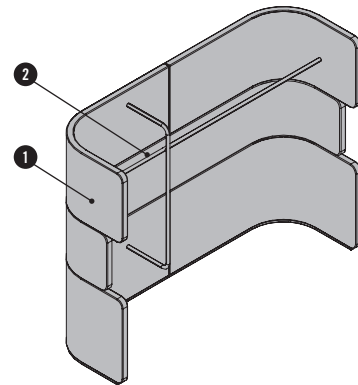

PHONE BOOTH


- 1 Top ring**
- 2 Middle ring**
- 3 Bottom ring**

The Phone Booth consists of three shaped wood segments, upholstered with dimensionally stable polyurethane foam padding. Optionally as a fire resistant version (CMHR). Covers always come with double stitching.

Supportive metal rod structure screwed to steel tubing base. Metal floor ring in SZ black, powder-coated.


The Phone Booth must be mounted to a PARCS wall or a building wall with the included wall-mounting bracket.

Sound absorption according to ISO 11654
 Rated sound absorption level α_w 0.65 (in acoustically activated areas)
 Absorption class = C






Configuration options:

- Single-coloured
- Inside and outside colours different
- Inside single-coloured, outside multi-coloured
- Outside colour of the ring is the same as the inside colour



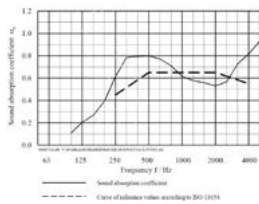


OVERVIEW & DIMENSIONS




DOCK-IN BAY OPEN BAY






DOCK-IN BAY SINGLE BAY




DOCK-IN BAY WALL BAY



DOCK-IN BAY TWIN BAY









PHONE BOOTH





Measurements in mm

OVERVIEW & DIMENSIONS



DOCK-IN BAY DOUBLE BAY

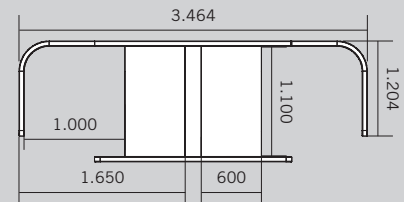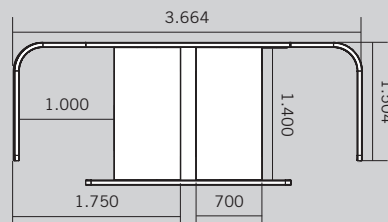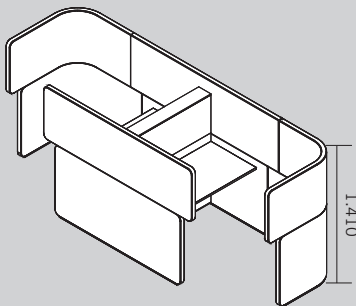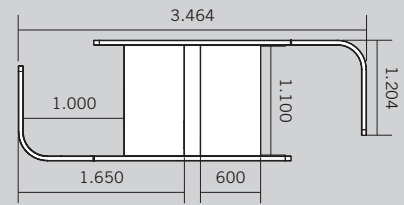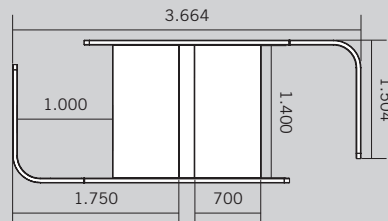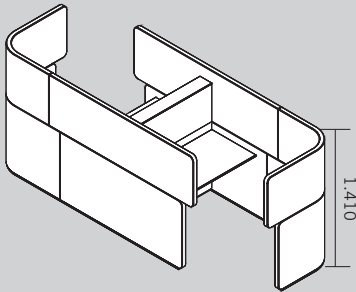

SERVICE DOCK

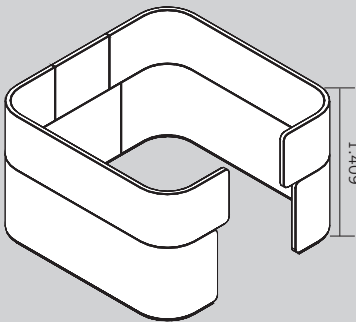


COAT RACK



Measurements in mm

OPTIONS - DOCK-IN BAYS


CABLE TRAY



Foldable cable tray available in 2 widths, depending on table width.
Optional selection, always automatically included when integrating a plug box.

Material and colour: Steel plate, SZ black powder-coated.


TABLE TOP SLOT



1 to 3 slots, depending on width of Dock-In Bay and installation of a plug box.
Quantity and positions are fixed and cannot be changed.

Material and colour: Plastic, AL aluminium or SZ black.

GROMMET HOLE




Maximum 2 grommet holes per table top. Diameter 80 mm. If a plug box is selected for another position, then a cable outlet can no longer be integrated in that position.

Positions: left, right, centre (excludes left and right) or * left and right

*If cable outlets are configured for left and right, a plug box can also be installed in the centre of a table top with a width of 1.400 mm.

Material and colour: Plastic, in WI white, AL aluminium or SZ black.

PLUG BOX




Maximum 1 plug box per table top. If a cable outlet is selected for another position, then a plug box can no longer be integrated in that position.

Positions: left, right or *centre

*If cable outlets are configured for left and right, a plug box can also be installed in the centre of a table top with a width of 1.400 mm.

Material and colour: AL anodised aluminium


SHORTENED TABLE TOP



The table top's depth can be reduced so that cabling can be run in the rear over the 20 mm gap. In case of a shortened table top, a 3A connection plug board with aluminium enclosure cannot be mounted using a universal adapter.

OPTIONS - DOCK-IN BAYS

DESK SHELF




Maximum 1 desk shelf per temporary workplace. Equipped with a presence indicator that can be pointed upwards to show that the workplace is occupied.


Material and colour: Aluminium in WI white
The presence indicator has the same design as the desk shelf.

Position is fix and cannot be changed.

Possible positions

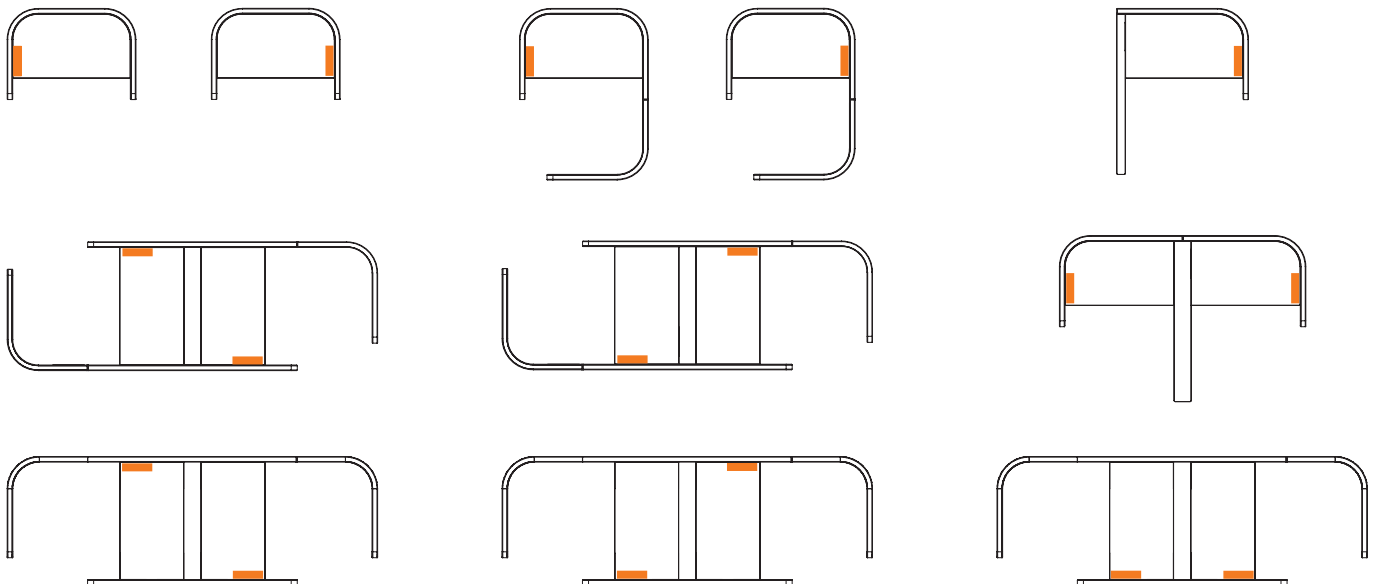


CLOTHES HANGER




Maximum 1 clothes hanger per temporary workplace.
Material and colour: MDF varnished in WI white
Position is fix and cannot be changed. Maximum load: 10 kg

Possible positions

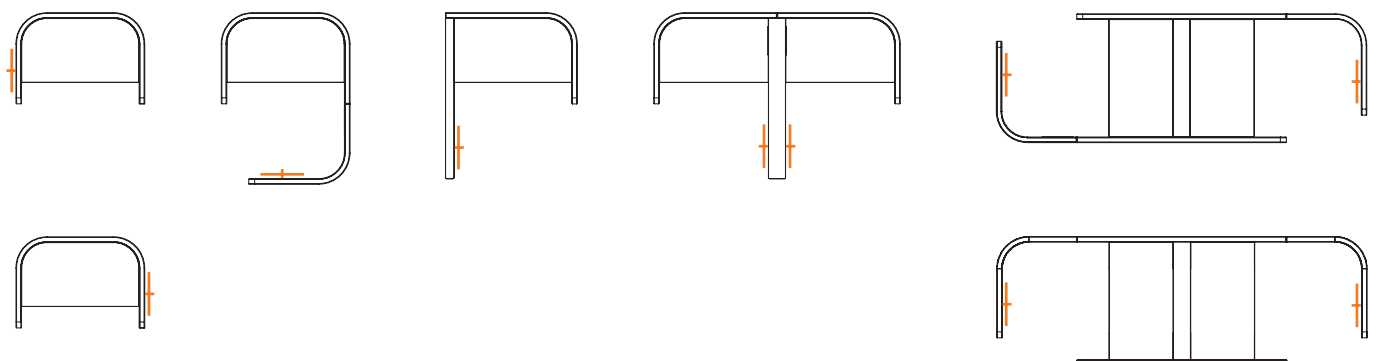

OPTIONS - DOCK-IN BAYS


LAMP 180 ADAPTED

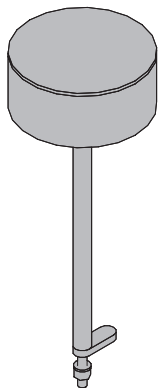


LED.next technology from Nimbus with diffuser surface made of acrylic glass for glare suppression and downward lighting with aligned conical holes. Luminaire head, tube and base in AL aluminium, powder-coated. Translucent lamp shade made of polyester film. Contact-free IR sensor switch with infinite dimming function in the foot of the luminaire.

Version screwed directly to the desktop.

Connected load: 8 W
 Luminous flux: 550 lm
 Colour temperature: 3.000 K
 Dimensions: 180 x 180 x 450 mm
 Weight: ca. 1.100 grams




Possible positions for attaching the luminaires to the desk in the Dock-In Bays

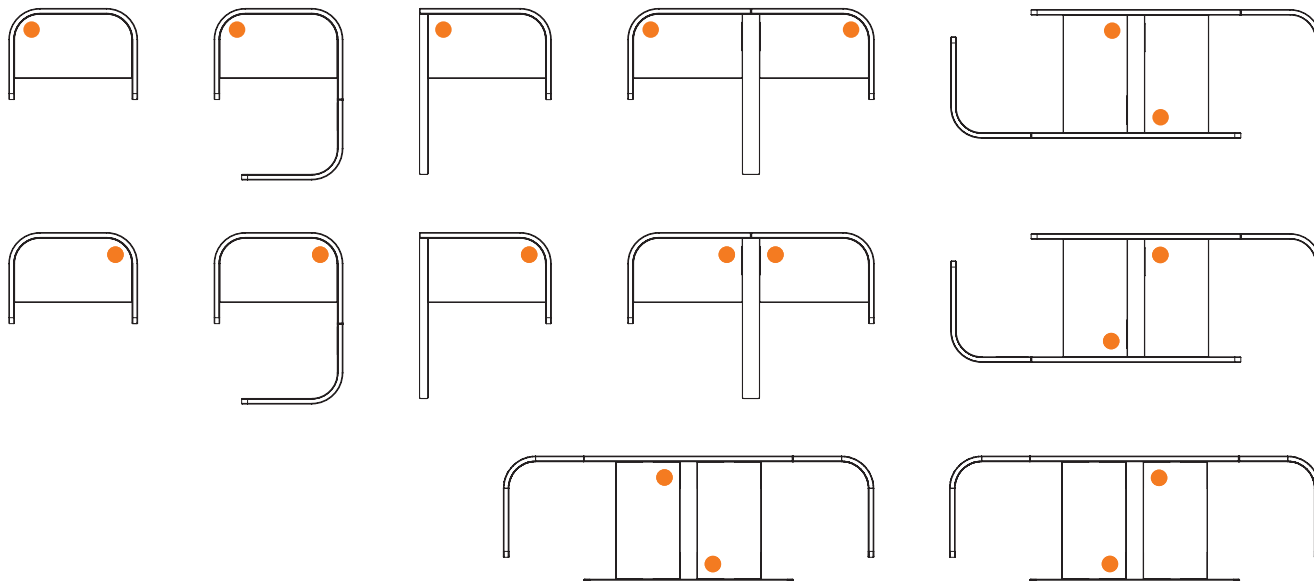

OPTIONS - DOCK-IN BAYS

CABLING



Dock-In Bays


Connection types

- Behind panel/ to universal adapter
- In top section/ to universal adapter
- With table clamp for 13 - 25 mm top thickness

- 1 connection plug board with 4x power sockets incl. switch
or 3x power sockets incl. sockets, 2x RJ45-CAT6
or 2x power sockets incl. switch, 2x RJ45-CAT6, 2x USB

- 1 electrical starter cable GST18 5.000 mm

CABLING IN THE WALL



Twin Bay and Double Bay

- 2 connection plug boards with 4x power sockets
 - *or 3x power socket, 2x RJ45-CAT6
 - *or 2x power socket, 2x RJ45-CAT6, 1x VGA and audio
 - *or 2x power socket, 2x RJ45-CAT6, 1x HDMI and audio

- 1 electrical starter cable GST18 5.000 mm
- Optional: 1 electrical interconnecting cable GST 18 5.000 mm

- *Optional: 2 input cable sets (2x network cables RJ45-CAT6 1.200 mm)


Wall Bay

- 1 connection plug board with 4x power sockets
 - *or 3x power socket, 2x RJ45-CAT6
 - *or 2x power socket, 2x RJ45-CAT6, 1x VGA and audio
 - *or 2x power socket, 2x RJ45-CAT6, 1x HDMI and audio

- 1 electrical starter cable GST18 5.000 mm
- Optional: 1 electrical interconnecting cable GST 18 5.000 mm

- *Optional: 1 input cable set (1x network cables RJ45-CAT6 1.200 mm)

CABLING UNDER THE DESK (EXTENSION)



Open Bay, Single Bay and Wall Bay


- 1 connection plug board with 3x power sockets
- 1 electrical starter cable GST18 5.000 mm
- Optional: 1 electrical interconnecting cable GST 18 5.000 mm

Twin Bay and Double Bay

- 2 connection plug boards with 3x power sockets
- 1 electrical starter cable GST18 5.000 mm
- Optional: 1 electrical interconnecting cable GST 18 5.000 mm


OPTIONS

CLOTHES HANGER - COAT RACK




Material and colour: MDF varnished in WI white

PERCH - PHONE BOOTH



The perch is made of a shaped wood base plate, upholstered with dimensionally stable polyurethane foam padding. Can be hooked into the Phone Booth's support structure between the middle and bottom ring. Covers always come with double stitching. Covers are available in all fabrics in price groups P0 and P2-P4 from the Bene seating furniture collection.

SHELF - PHONE BOOTH



Desk shelf consisting of shaped wood with veneered or varnished surface. It is hung between the middle and upper rings.

Colours: Varnished MDF (WI white, BS basalt), veneer group 1 oak (EY oak sylt)
Dimensions: Width: 270 mm, Depth: 190 mm, Height: 385 mm

COLOURS & MATERIALS

VENEER: Maple



AK canad. maple

VENEER: Beech




BG beech grey




BU beech, natural

VENEER: Oak



EY oak sylt



ER oak amaretto

EV oak volcano

VENEER: Walnut



NF american walnut



NR walnut siena

NB walnut umbra

NA wal. anthracite



BJ bamboo

.....

All fabric and leather collections are available as cover:

Urban Plus, Xtreme Plus, Step, Step Melange, Remix, Europost, Field, Clara, Divina, Steelcut, Stamskin Top, Marvel, Hallingdal, Steelcut Trio, Divina Melange, Divina MD, Greenwich, Greenwich Uni. More information about the specific fabric collections is available at www.bene.com.

BENE WORKS SUSTAINABLY

Bene plays a leading role in responsible environmental management. This policy is practised throughout all company divisions – from product development, procurement, production and logistics to product recycling. Bene considers ecology to be a central element of its responsible and sustainable corporate strategy. Bene sees the legal regulations as minimum requirements and strives for better and more sustainable environmental protection throughout the group. Bene's environmental policy principle is: **Avoidance – Minimisation – Recycling – Disposal.**

PARCS DOCKLANDS SINGLE BAY – ECOLOGICAL STANDARDS


- 99% recyclable
- 83.50% renewable raw materials
- 12.97% use of recycled product materials (9.10% post-consumer, 3.87% pre-consumer)
- 10.61% use of recycled product materials that comply with LEED (9.10% post-consumer, 3.87% pre-consumer)
- Resource-conserving product design
- Use of certified wood (chain of custody)
- Use of materials tested for presence of hazardous substances
- No PVCs, chromium, lead or mercury
- Individual parts can be sorted according to homogeneous categories
- Recyclable, with a positive contribution to the carbon footprint(average 160.5 kg CO₂)

PARCS DOCKLANDS SINGLE BAY LEED POINTS

Leadership in Energy and Environmental Design (LEED) is a system developed by the U.S. Green Building Council to classify ecological construction. As an internationally recognised standard, LEED sets out numerous guidelines for environmentally friendly, resource-efficient, and sustainable construction. The use of PARCS Docklands Single Bay is an important contribution to LEED certification. The following criteria for this are from »LEED 2009 for Commercial Interiors«:

MR Credit 4	Recycled content	up to 2 points
MR Credit 5	Regional materials	up to 2 points
MR Credit 7	Certified wood	up to 1 point
IEQ Credit 4.5	Material with low hazardous substance content	up to 1 point

PARCS DOCKLANDS SINGLE BAY MATERIAL COMPONENTS

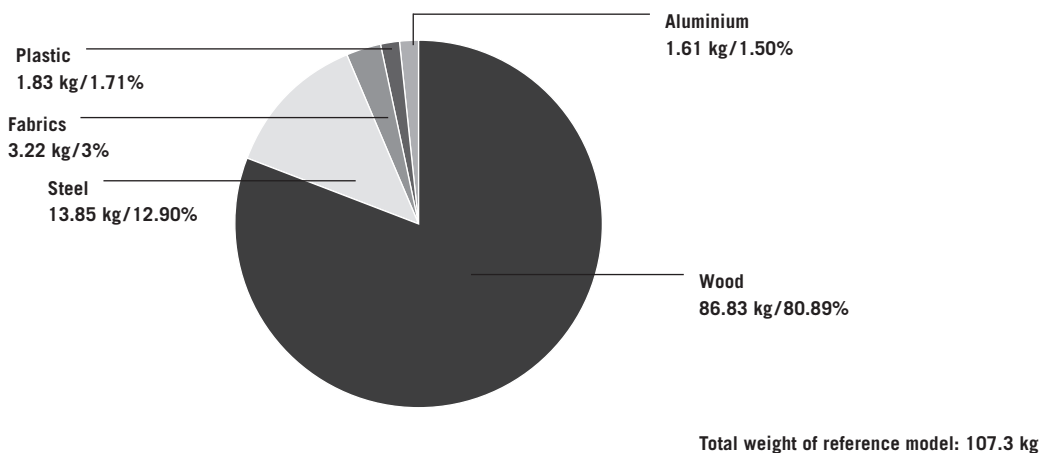

Environment-related information about Bene: www.bene.com/sustainability

